

halo

TIRE INFLATOR

HOSE FITTING SERVICE KIT

SK-200HF
USER MANUAL

FOLD ALONG DOTTED LINE



DESCRIPTION

These instructions describe the installation of replacement Halo hose fitting parts.

TOOLS



Torque wrench (30 in-lbs)
w/ custom socket*




5/8" Wrench

*Available Aperia tool kit (part #: TK-200HF).


PARTS & CONSUMABLES



Hose fastener



Hose connector



O-ring grease
and applicator



Aperia provided
dowel



Aperia provided
alcohol wipes


INSTALLATION STEPS

- 1 Clean hose fitting bore by first wiping around the bore and then pushing a clean alcohol wipe through with dowel until it comes through clean.


IF LARGE DEBRIS PRESENT IN BORE PLEASE CONTACT APERIA FOR FURTHER INSTRUCTION.

CAUTION


Do not use screwdriver or other hard object to push wipe through. May result in damage to hose bore.

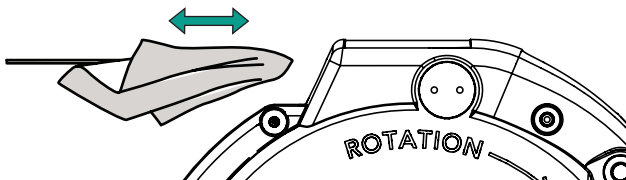

- 2 Apply a thin coating of o-ring grease, Magnalube-G or equivalent, around entire circumference of red o-rings on hose fittings.

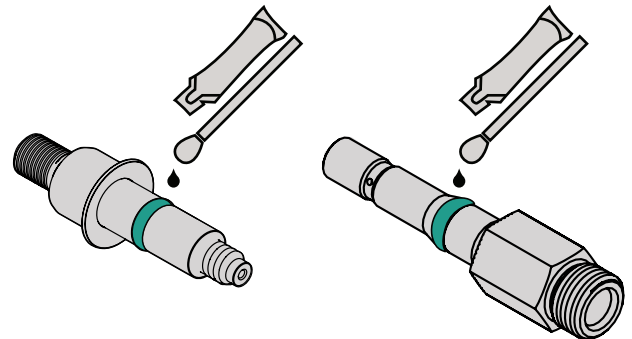

- 3 Insert hose fastener and hose connector as shown in photo

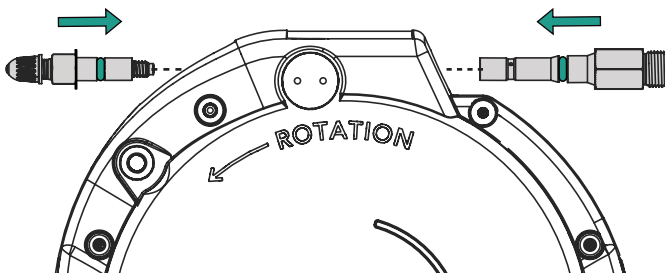

- 4 Use 5/8" wrench to hold the hose connector and tighten the hose fastener to **30 in-lb** and recheck the torque after Halo install.

CAUTION

Fully engage torque wrench to avoid damage.

